Keith Shuman would like spending approval for the following work orders:

#1	Replacing roof decking at Community Park Pavilion	$1,187.50
#2	Curb repair 233 Spirit Court	$ 245.56
#3	Stain Community Park Pavilion	$ 467.00
#4	Patch Hoch Road	$ 826.20
#5	Repair drain at 128 Cornerstone Dr	$ 721.55
#6	Grade Ridge Road to correct drainage	$ 670.00
#7	Grade and add millings to correct drainage on Ridge Rd	$ 310.00
#8	Grade Koller Road to correct drainage	$ 620.00
#11	Repair drainage W Wesner Rd	$1,711.30
#12	Repair drainage Schaeffer Rd	$1,286.80
#13	Repair inlet W Walnut Tree Drive	$ 600.40
#14	Repair travel lane Buena Vista Road	$2,780.00
#15	Repair drainage issues Evansville Road	$1,690.30
		$13,116.61

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 1

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Roof decking at Community Park Pavilion needs Replacing 4' x 100'

* See Pics

Statement of Work Needed

Replace Deckings, Re-shingle and cap Fasc Boards

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Lumber		$	$ 300.00
2	Shingles, Felt, Drip edge etc			737.50
3	Brake Rental			50.00
4	Misc. Tools + Fasteners			100.00
5				
6				
7				
				$ 1,187.50

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 2

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Repair curb at 233 Spirit CT

* See Pics

Statement of Work Needed

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	~~6~~ bags Sakrete 80 lbs	4~~8~~	$~~190.56~~	$
2			3.97	190.56
3	½" x 6" x 10' fiber expansion	1	5.00	5.00
4	Macadam			50.00
5				
6				
7				
				$ 245.56

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE


233
Sprint Ct

WORK ORDER - MAIDENCREEK TOWNSHIP		WORK ORDER # 3

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Comm Park Pavilion only half finished Staining

Statement of Work Needed

Complete Staining

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Stain 10 gal		$	$ 332.00
2	List			135.00
3				
4				
5				
6				
7				
				$ 467.00

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 4

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem: Patching on Hoch Rd at retirement Building

Statement of Work Needed

2. Excavate and macadam Road

Start Date: | End Date:

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Macadam	7 Ton	$	$ 396.20
2	Roller Rental			250.00
3	TACK			50.00
4	Road Saw Rental			130.00
5				
6				
7				
				$ 826.20

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE

MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 5

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Drain Falling at 128 Cornerstone

Statement of Work Needed

Repair Drain and Macadam

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Paving Roller		$	$ 250.00
2	Asphalt			$ 127.40
3	Road Saw			$ 195.00
4	80 lbs bags Sakrete	35	3.97	138.95
5	Qu.Krete Mortar Mix 60 lbs	2	5.10	10.20
6				
7				
				$ 721.55

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 6

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Water sitting and not flowing to Drain on Ridge Rd.

* See Pic

Statement of Work Needed

Grade road to remove water at shoulder 640'

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Skidloader Rental	2 Days	$	$ 620
2	Straw and Seed			50
3				
4				
5				
6				
7				
				$ 670

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

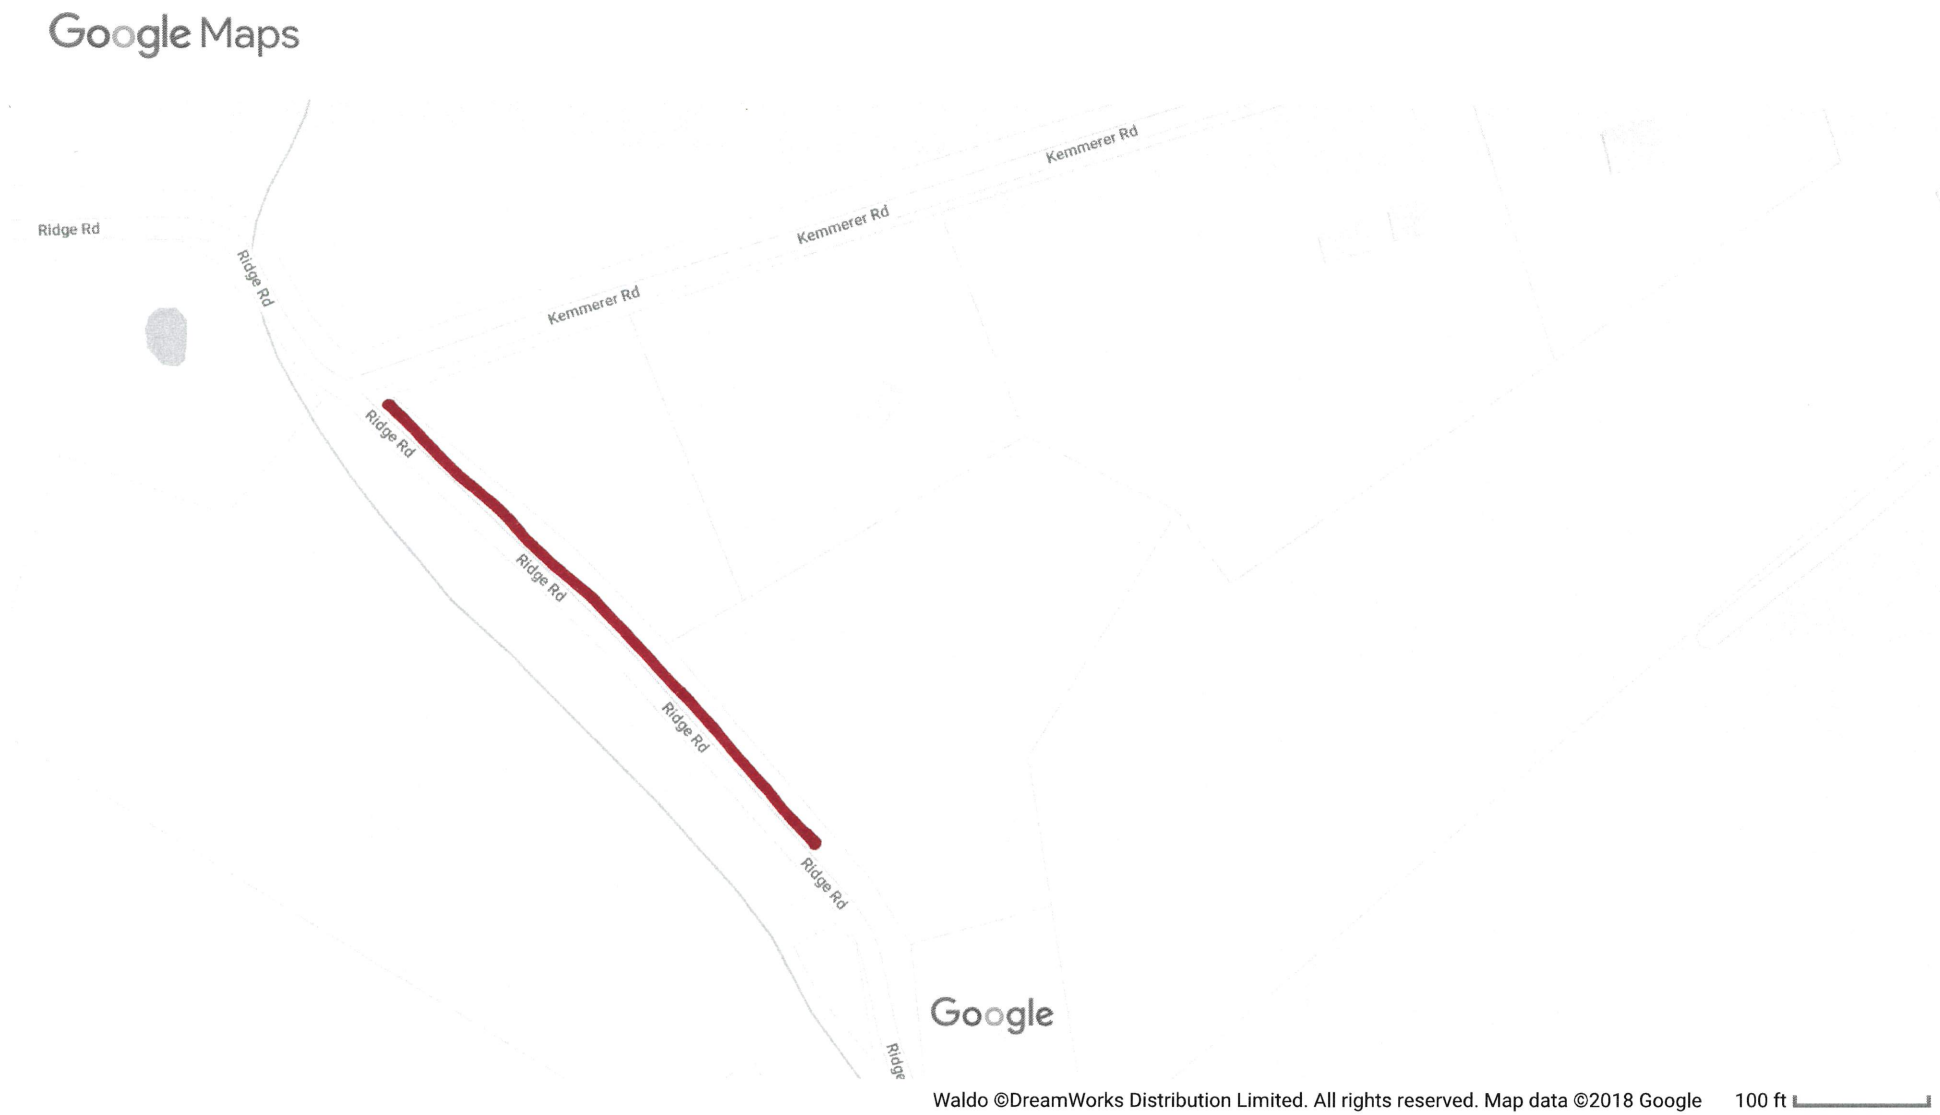
Google Maps
Ridge Rd
Ridge Rd
Kemmerer Rd
Kemmerer Rd
Kemmerer Rd
Ridge Rd
Ridge Rd
Ridge Rd
Ridge Rd
Ridge
Google
Waldo ©DreamWorks Distribution Limited. All rights reserved. Map data ©2018 Google
100 ft

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 7

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Standing water at edge of road

* See Pic

Statement of Work Needed

Re-Grade and add millings to road edge 300'

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	SKid loader Rental	1 day	$	$ 310
2				
3				
4				
5				
6				
7				
				$ 310

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

Google Maps



Waldo ©DreamWorks Distribution Limited. All rights reserved. Imagery ©2018 Google, Map data ©2018 Google 20 ft

WORK ORDER - MAIDENCREEK TOWNSHIP		WORK ORDER # 8

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Water not flowing to shoulder on Koller Rd.

* See Pic

Statement of Work Needed

Re-grade to set water to Shoulder 1043'

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Skidloader rental	2 days	$	$ 620
2				
3				
4				
5				
6				
7				
				$ 620

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE


Koller Rd
Koller Rd
Koller Rd
Koller Rd
Koller Rd
Koller Rd
Koller Rd
Koller Rd
Koller Rd
Koller Rd
Ridge Rd
Ridge Rd
Ridge Rd
Google
Waldo ©DreamWorks Distribution Limited. All rights reserved. Map data ©2018 Google
100 ft

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 11

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Laying water on W. Wesner Rd

Statement of Work Needed

Excavate Shoulder where water sits
Install geotextile
Install #3 Stone
Insall 2B
Install Geogrid
Plant GRASS

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	#3 Stone	6 ton	$	$ 75.00
2	#2B Stone	2 ton		$ 25.00
3	Geo textile			$ 178.00
4	Geo Grid			$ 1358.00
5	Seed + Seed			75.00
6				
7				
				$ 1711.30

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 12

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Laying water on Schaffer Rd

Statement of Work Needed

Excavate shoulder
Install Geotextile
Install Stone
Install Geogrid

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Stone 3B	4 ton	$	$ 50
2	Stone 2B	2 ton		25
3	Geotextile			178
4	Geogrid			958.80
5	Salt + Seed			75.00
6				
7				
				$ 1286.80

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 13

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Catching inlet structure with plow because sinking asphalt above West Walnuttree Road bridge on down flow side of creek.

Statement of Work Needed

Remove & replace asphalt. patch structure with plantitop X.

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	Road Saw		$	$ 195.00
2	Paving Roller			$ 250.00
3	Asphalt			$ 127.40
4	Plantitop X			28.00
5				
6				
7				
				$ 600.40

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 14

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Road Deteriorated on Buena Vista

Statement of Work Needed

Replace a section of lane
Excavate and remove asphalt
Compact Subase
Install 25 mm
Install 9.5 mm

See Pics 10' x 88'

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	25 mm		$	$ 1039.00
2	9.5 mm			1246.00
3	Roller rental			$ 250.00
4	Tack			50.00
5	Road saw			$ 195.00
6				
7				
				$ 2780.00

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE

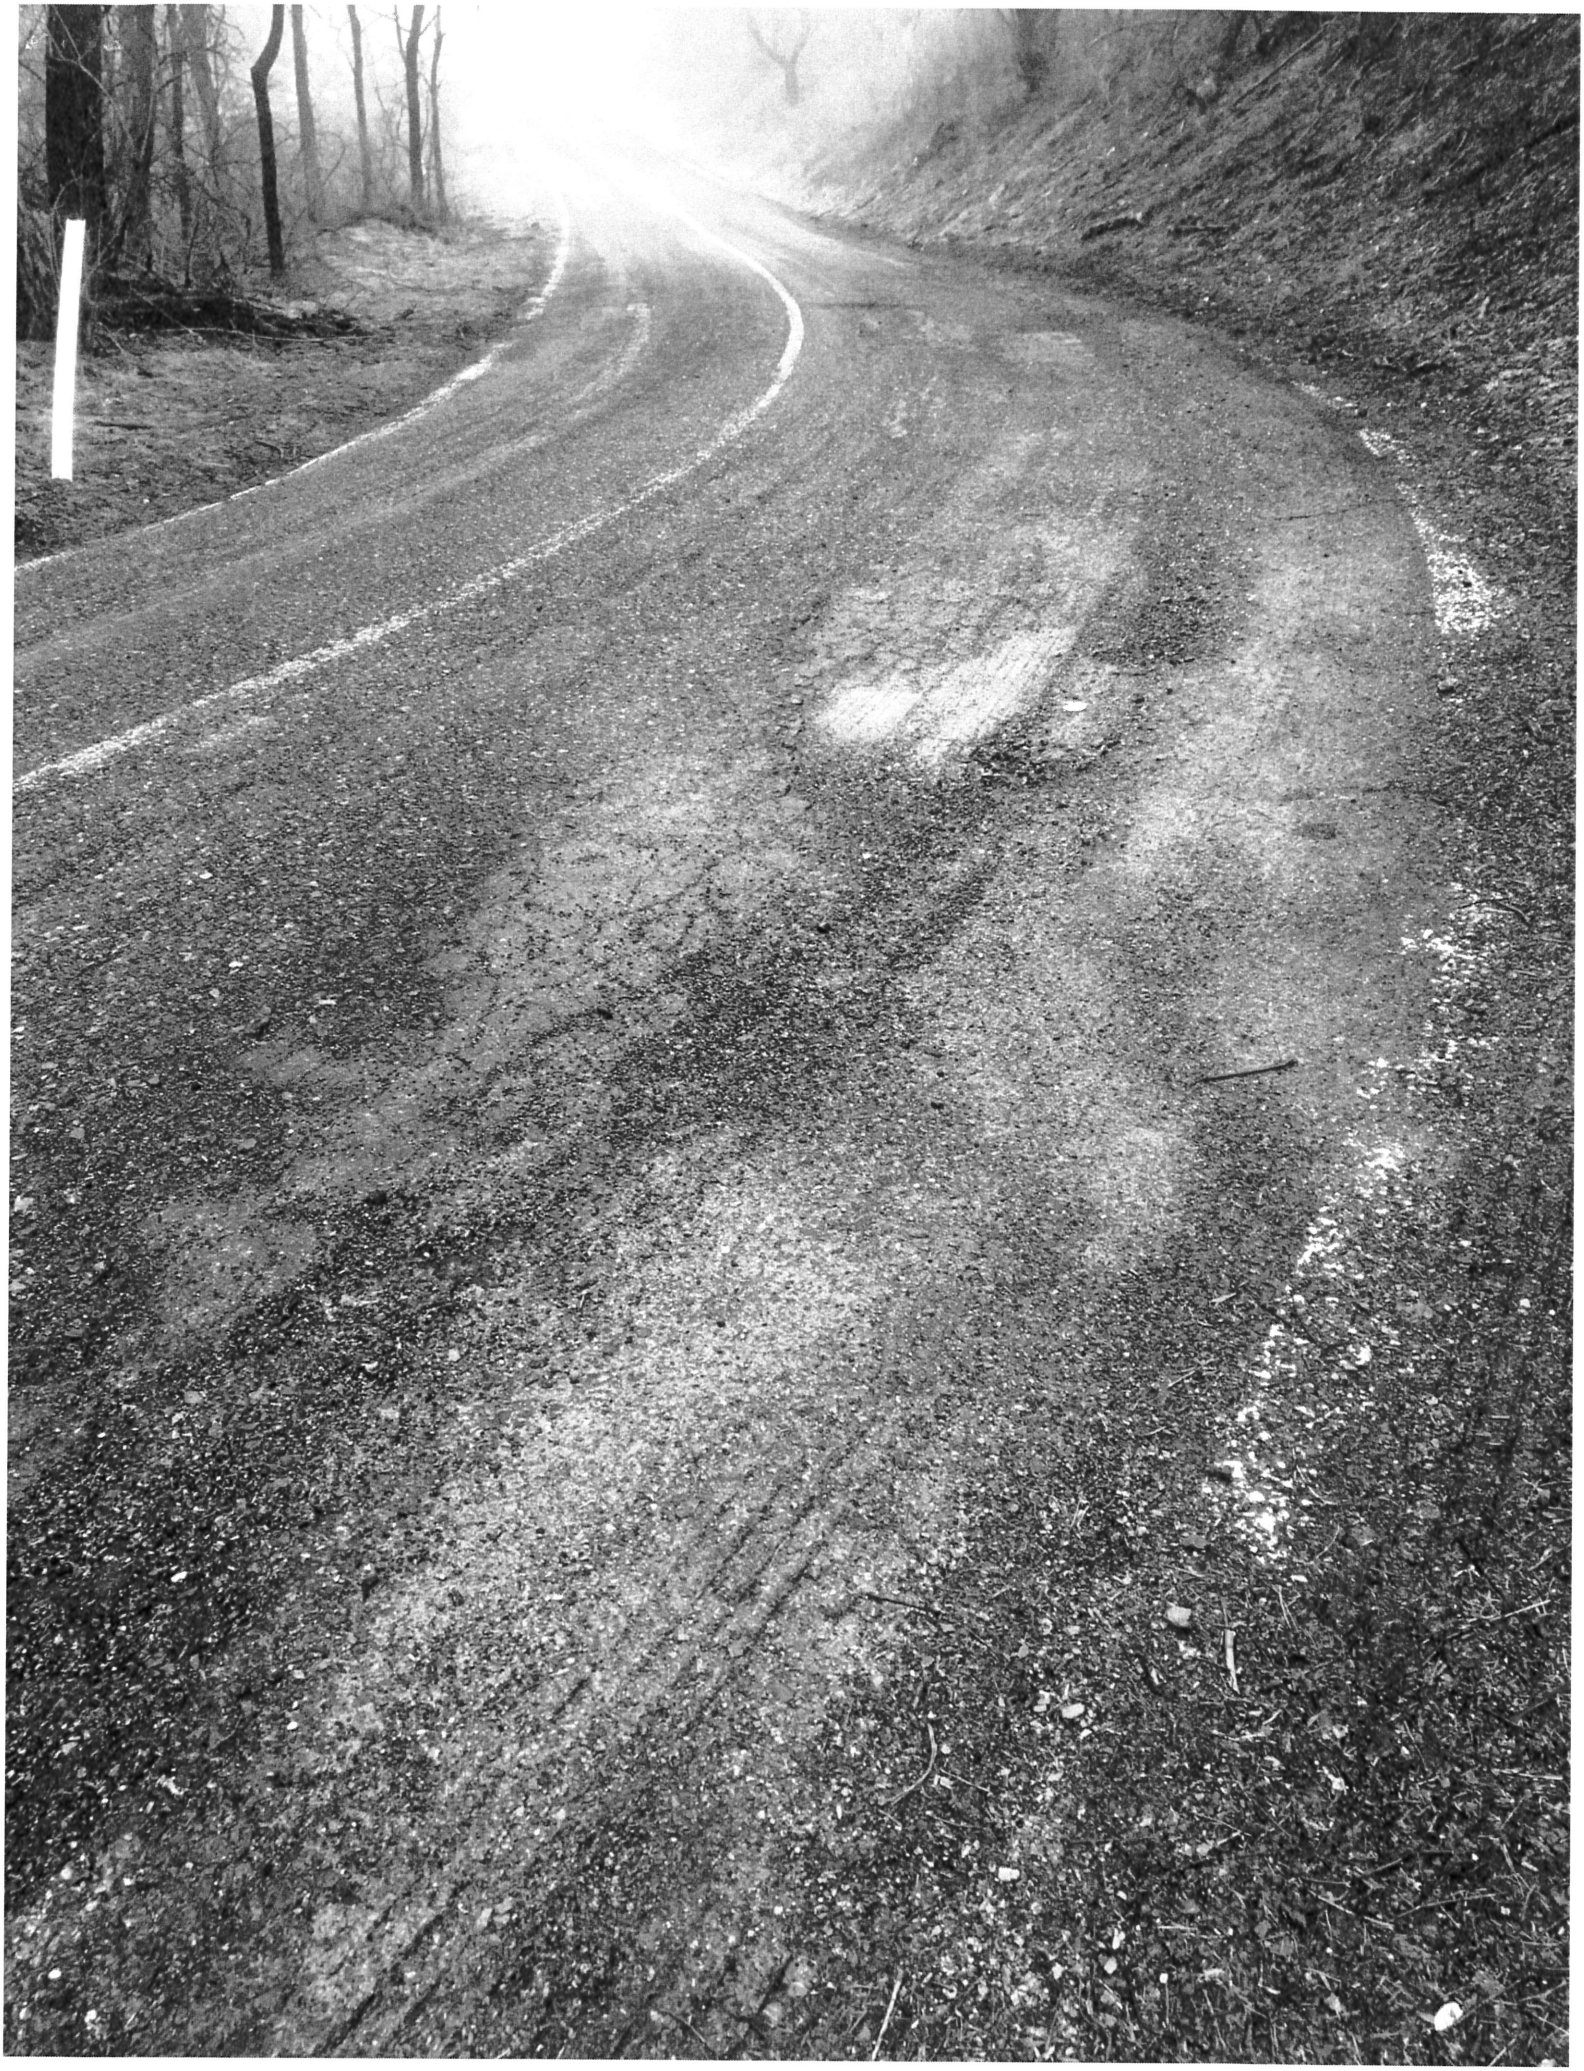

Google Maps



Waldo ©DreamWorks Distribution Limited. All rights reserved. Imagery ©2018 Google, Map data ©2018 Google 50 ft

WORK ORDER - MAIDENCREEK TOWNSHIP	WORK ORDER # 15

PO Box 319
1 Quarry Road
Blandon, PA 19510

Problem

Drainage issues on Evansville Rd

Statement of Work Needed

Install two French mattresses and Under Drain Before Paving

Start Date:	End Date:	

Budget Category:

	Materials Needed	Quantity	Unit Cost	Total
1	AASHTO #3 stone	24 tons	$ 12.50	$ 300.00
2	AASHTO #57 stone	10 tons	12.50	$ 125.00
3	Nonwoven geotextile filter fabric			$ 355.80
4	6" Corrugated Perforated pipe	(2)		$ 354.00
5	Paving roller			$ 250.00
6	19 mm Asphalt	5 tons	$ 50.60	$ 253.00
7	2A modified	6 tons	$ 8.75	52.50
				$ 1,690.30

PUBLIC WORKS DIRECTOR SIGNATURE WHEN COMPLETE	MANAGER APPROVAL OF EXPENDITURE